


GAS STAY LIFT PD-LIFTNEW

LIFTS



APPLICATION

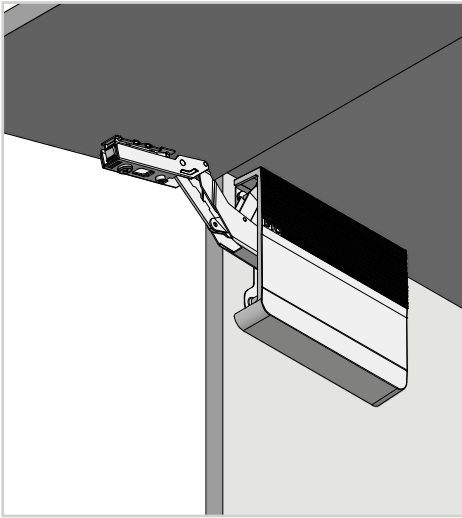


CHARACTERISTICS




PACKING



SET INCLUDES

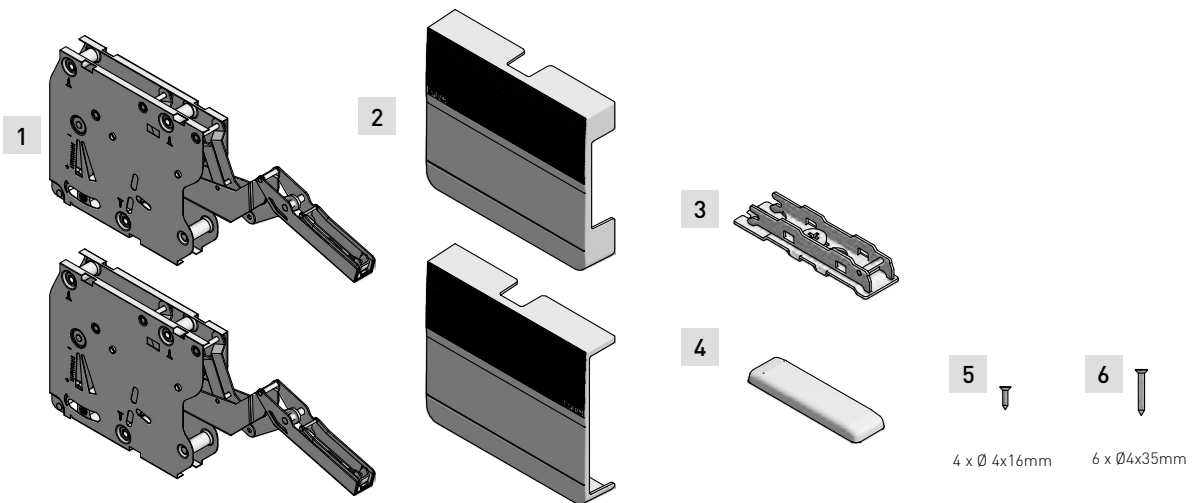


Cabinet planning information

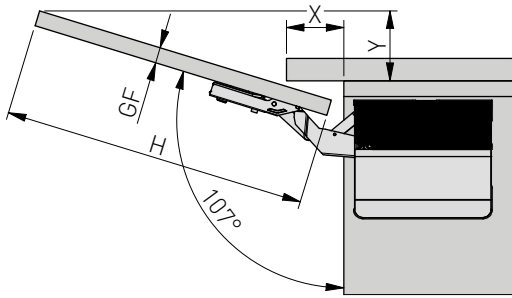


GF (mm)	16	19	22	26	28
X (mm)	70	58	48	35	26
Y (mm)	$Y = H \times 0,29 - 15 + GF$				

Spacing of mounting holes in the body and on front






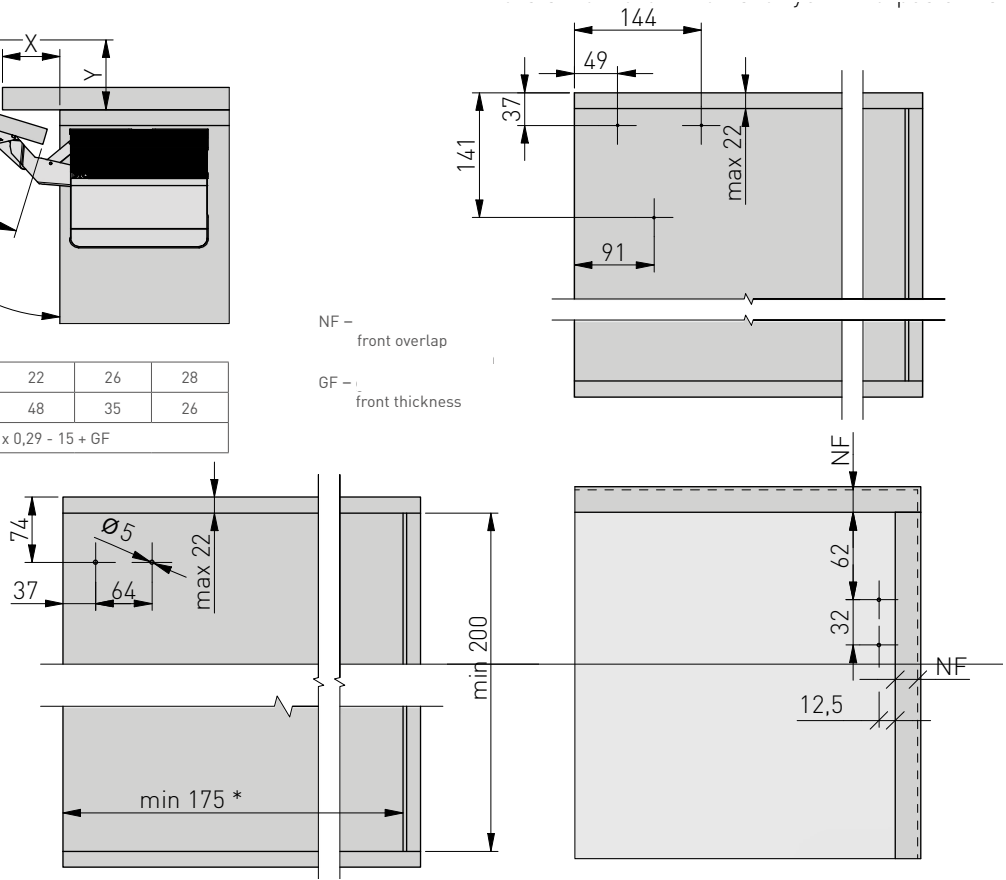


* for mounting with hanger min. = 240


Product dimensions

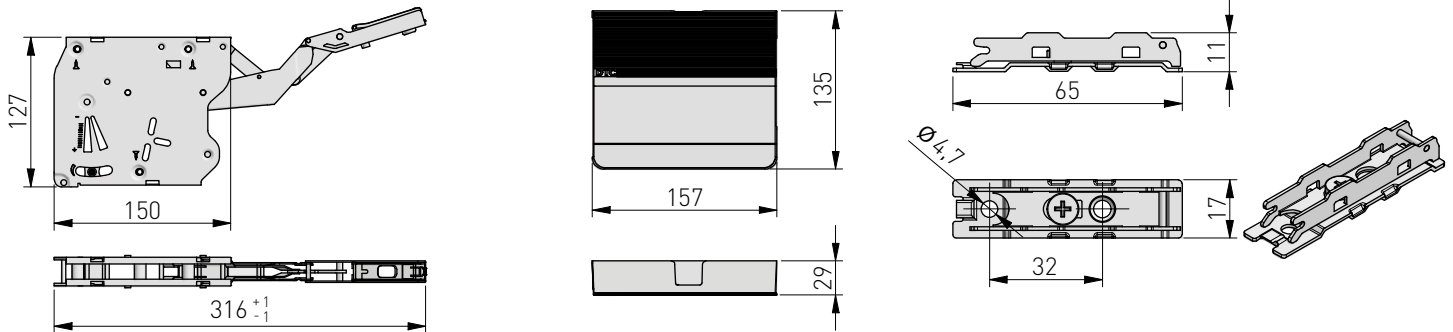


ASSEMBLY

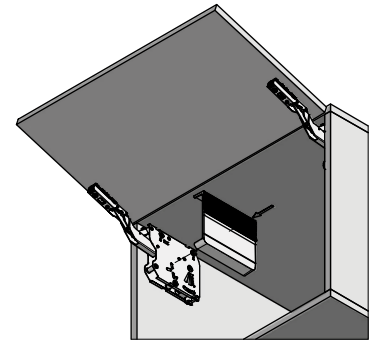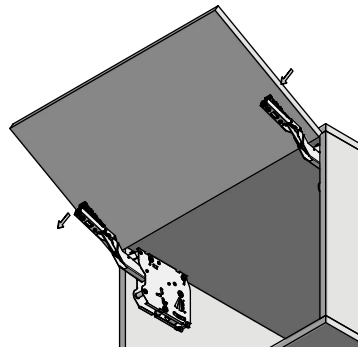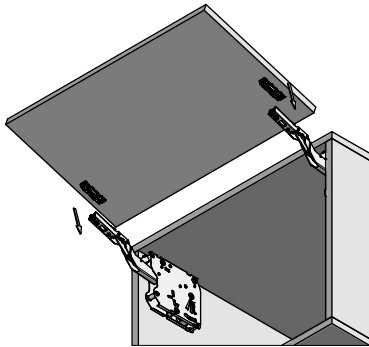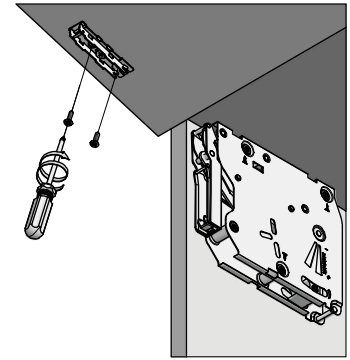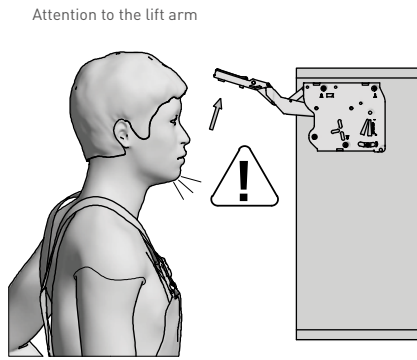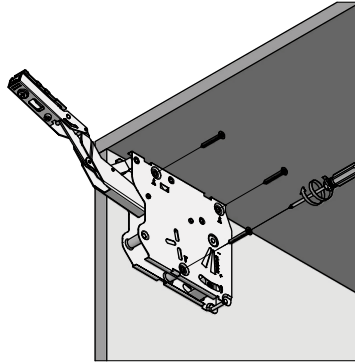


ADJUSTMENT

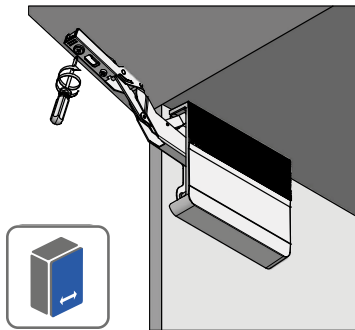

± 2 mm

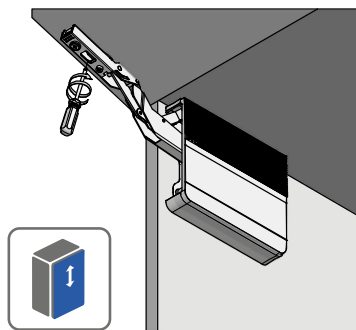


± 2 mm


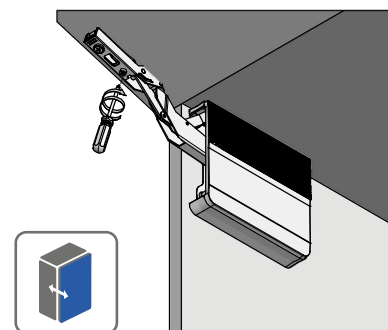


± 2 mm


OPENING FORCE ADJUSTMENT

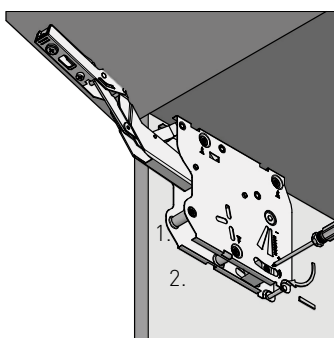




1. Main adjustment
2. Precision adjustment

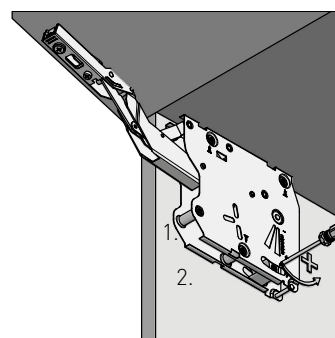


1. Main adjustment
2. Precision adjustment



ANGLE STOP INSTALLATION

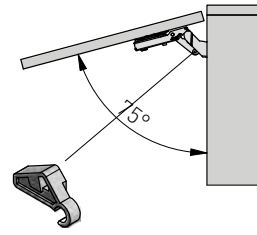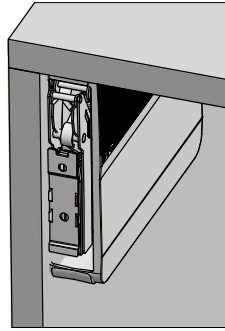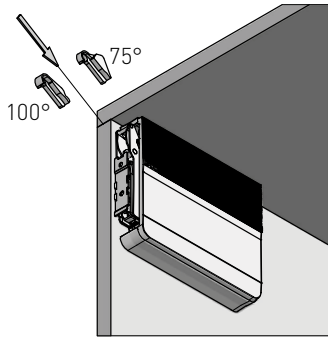

PD-LIFT-OG75

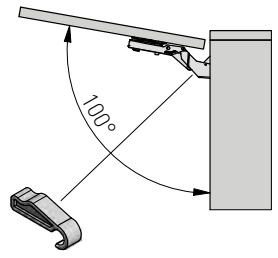

PD-LIFT-OG100

REMOVAL

